


10/100/1000 Ethernet TAP

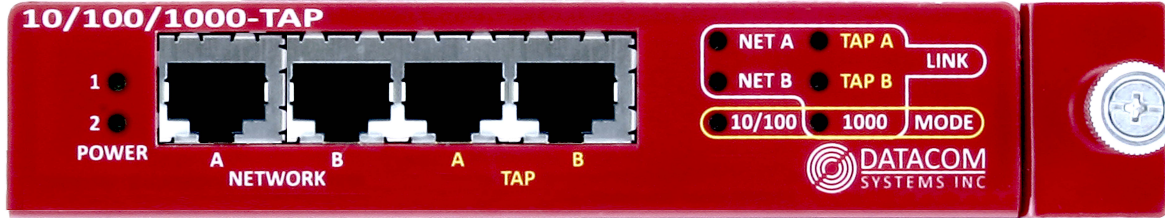

Ideal for secure non-intrusive, dedicated access to your network links

A convenient DIP switch on the back of the tap can be used to select auto-negotiation at 10/100 or fixed speed and duplexing settings at 1000Mbps. The 10/100/1000 Ethernet TAP's fault tolerant design will help ensure that network performance and integrity will not be affected by power loss.

- Permanent In-Line access for monitoring of 10/100/1000 Ethernet links
- Redundant power supply minimizes risk of power loss
- Ideal for Security and Monitoring applications
- View ALL seven layers of network traffic
- View ALL traffic on both sides of full duplex links

Technical Specifications

Ports

One (1) 10/100/1000 (RJ45) Network TAP port pair
Two (2) 10/100/1000 (RJ45) Monitor Ports

Power Requirements

Two (2) External AC Adapters (included)
Input: 100-240 VAC, 50-60Hz, 0.8A

Physical Dimensions

1.07 x 5 x 5 in. (2.7 x 12.7 x 12.7 cm)

Weight

12 oz. (0.34 Kg)

Certifications

CE, ROHS

Environmental

Operating Temperature: 32° to 104° F (0° to 40° C)
Storage Temperature: -22° to 149° F (-30° to 65° C)
Humidity: 5% to 90% non-condensing

Warranty

One (1) Year Standard Hardware Warranty
Extended Support available

ORDERING INFORMATION

Product	Description
10/100/1000-TAP	10/100/1000 Ethernet Tap
TAP RMC-3	3-Unit Rack Mount - 1RU
RMC-12-3	12-Unit Rack Mount - 4RU